
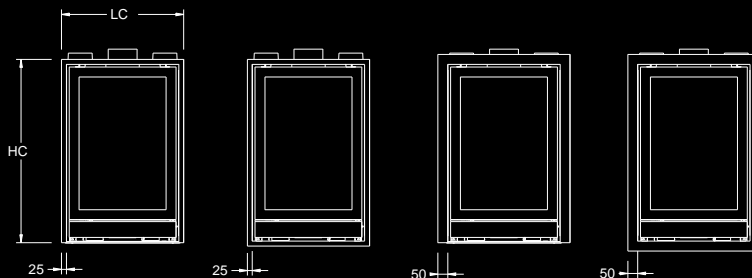


PRODUCT SPECIFICATIONS :

IQ33 | IQ43 | IQH33 | IQH43

DIMENSIONS WITH FINISHING FRAMES

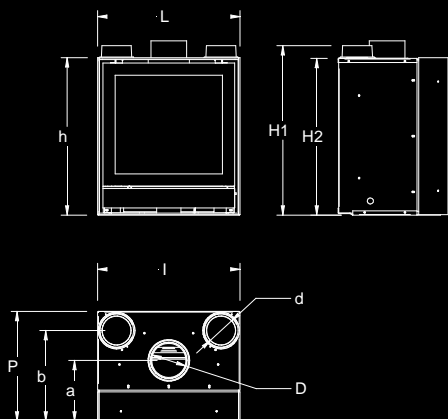

| | IQ33 | IQ43 | IQH13 | IQH33 |
|---------------------|-----------|-----------|-----------|-----------|
| | LC / HC | LC / HC | LC / HC | LC / HC |
| 3-sides frame 25 mm | 618 / 661 | 726 / 683 | 618 / 927 | 726 / 863 |
| 3-sides frame 50 mm | 618 / 678 | 726 / 700 | 618 / 944 | 726 / 880 |
| 4-sides frame 25 mm | 668 / 686 | 776 / 708 | 668 / 952 | 776 / 888 |
| 4-sides frame 50 mm | 668 / 728 | 776 / 750 | 668 / 994 | 776 / 930 |

TECHNICAL DATA :

| | IQ33 | IQ43 | IQH13 | IQH33 |
|------------------------|--------------------|--------------------|------------------------------|------------------------------|
| Min.-max. heat output | 2 - 12 kW | 2,5 - 14 kW | 3 - 14 kW | 4 - 16 kW |
| Heat output to EN13229 | 9 kW | 10,5 kW | 9 kW | 12 kW |
| Heats up to | 360 m ³ | 420 m ³ | 360 m ³ | 480 m ³ |
| Efficiency | 85,2% | 85,6% | 81% | 77% |
| CO emissions | 0,135% | 0,06% | 0,08% | 0,08% |
| Flue diameter | 150 mm. | 180 mm. | 180 mm. | 180 mm. |
| Maximum log length | 400 mm. | 550 mm. | 550 mm. vert. / 400 mm. hor. | 550 mm. vert. / 500 mm. hor. |
| Weight | 135 kg. | 182 kg. | 178 kg. | 197 kg. |
| Certification | EN 13229 | EN 13229 | EN 13229 | EN 13229 |
| L [mm] | 584 | 692 | 584 | 692 |
| H1 [mm] | 695 | 717 | 961 | 897 |
| H2 [mm] | 643 | 668 | 909 | 845 |
| h [mm] | 644 | 666 | 912 | 848 |
| I [mm] | 583 | 691 | 583 | 691 |
| P [mm] | 450 | 498 | 450 | 498 |
| b [mm] | 371 | 421 | 371 | 421 |
| a [mm] | 249 | 280 | 249 | 280 |
| D [mm] | 150 | 180 | 150 | 180 |
| d [mm] | 120 | 120 | 120 | 120 |

STANDARD FEATURES :

- Woodbox® combustion technology
- Outside air inlet
- Heat-reflective white cast iron interior
- Cast iron door
- Clean glass system
- Ash pan
- Optional remote control available
- Built-in blower
- Optional finishing frames